

- CDMA 450 C-Band, RF-Rx SAW Filter
- Revision 0: June 2007


Electrical Characteristics

MAXIMUM RATING				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Operating Temperature Range	°C	-30	-	+80
Storage Temperature Range	°C	-40	-	+85
Maximum DC Voltage	V	-	-	0
Maximum Input Power	dBm	-	-	28
Source Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Load Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Package type & size	M			
Length x Width	mm ²	-	3.0 x 3.0	-
Height	mm	-	-	1.3

ELECTRICAL SPECIFICATION				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Center Frequency (Fo)	MHz	-	462.4	-
Insertion Loss within 460.0 ~464.8 MHz	dB	-	2.0	3.5
Stop Band Attenuation:				
0.3 ~ 450.0 MHz	dB	40	50	-
450.0 ~ 454.8 MHz	dB	40	45	-
483.0 ~ 505.0 MHz	dB	35	45	-
505.0 ~ 1000.0 MHz	dB	40	45	-
1000.0 ~ 2000.0 MHz	dB	25	35	-
VSWR within 460.0 ~ 464.8 MHz	-	-	1.6	2.0

Notes: (1) No Matching Network.


Package Dimensions

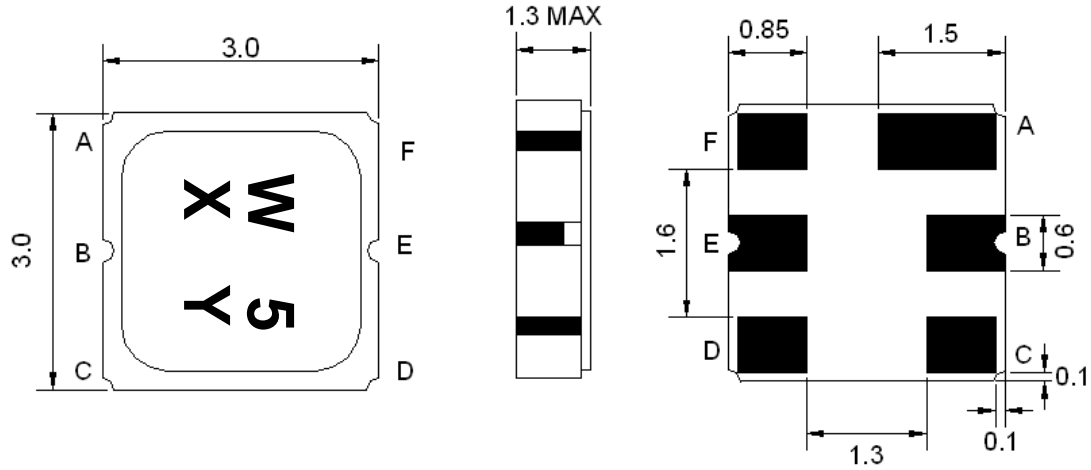

Marking Descriptions	
W	CDMA450 Application
5	Series Number
X	Date Code (Year)
Y	Date Code (Month)


Pin Description	
A, C, D, F	Ground
E	In
B	Out

Testing Environment


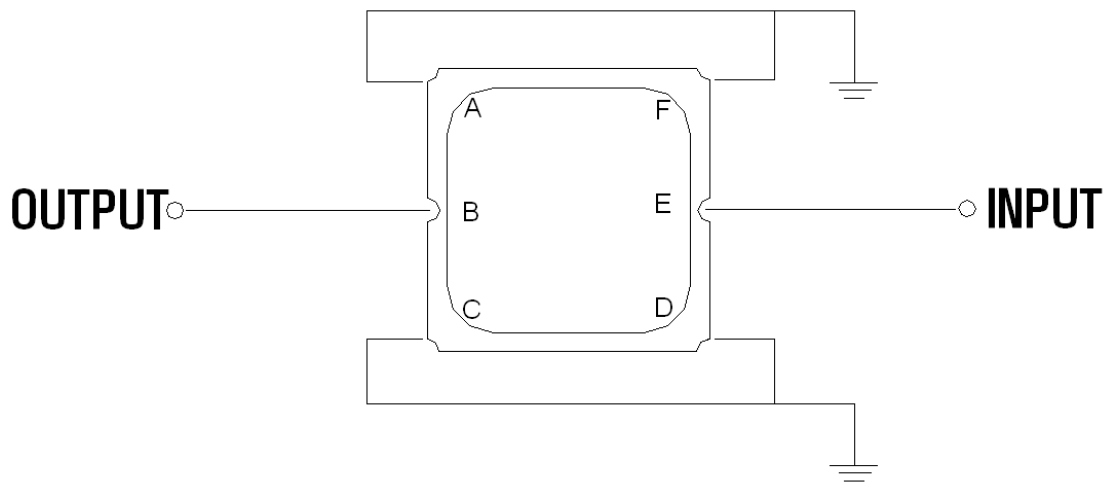


Source & Load Impedance: 50 Ω

Frequency Characteristics

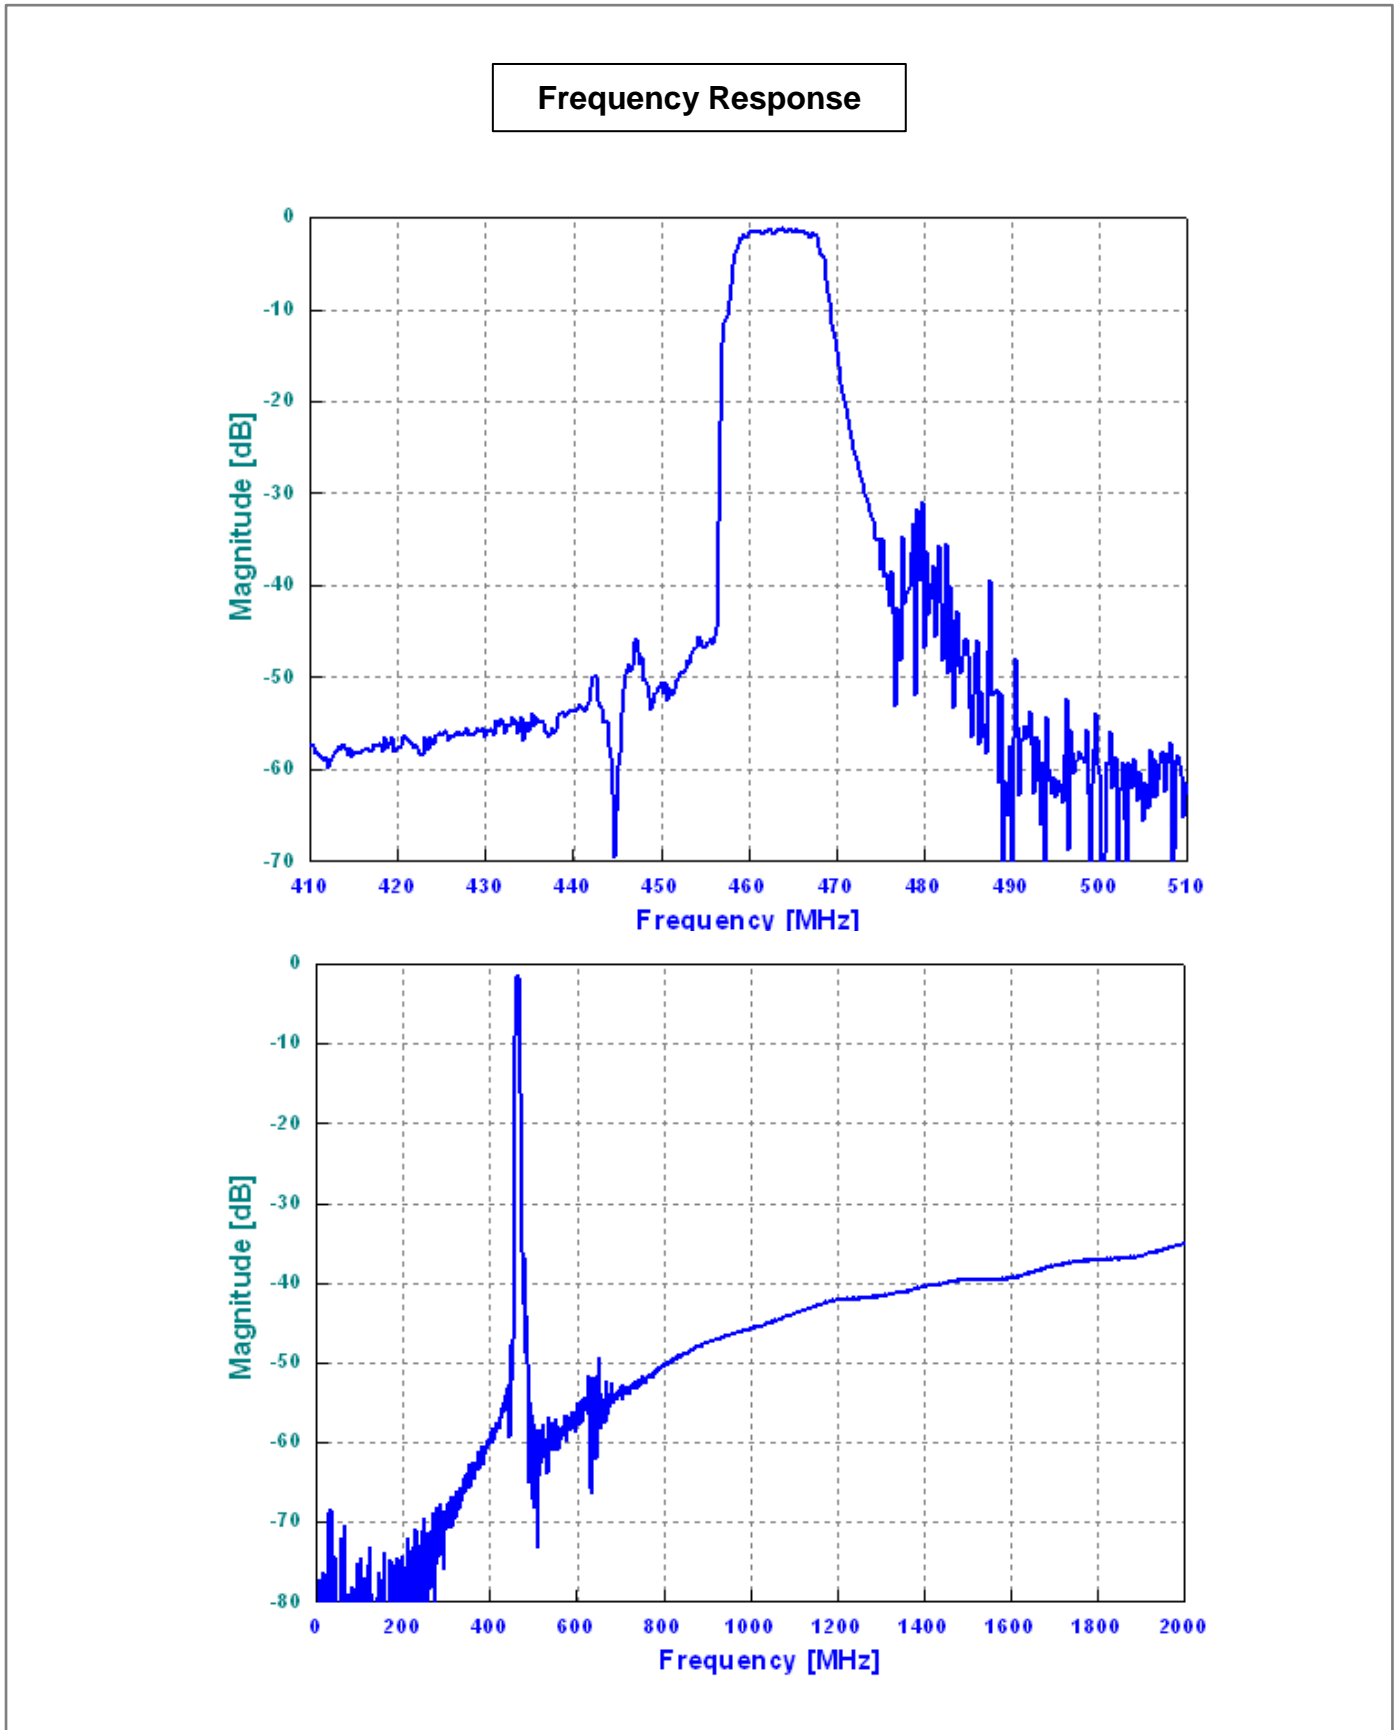

VSWR

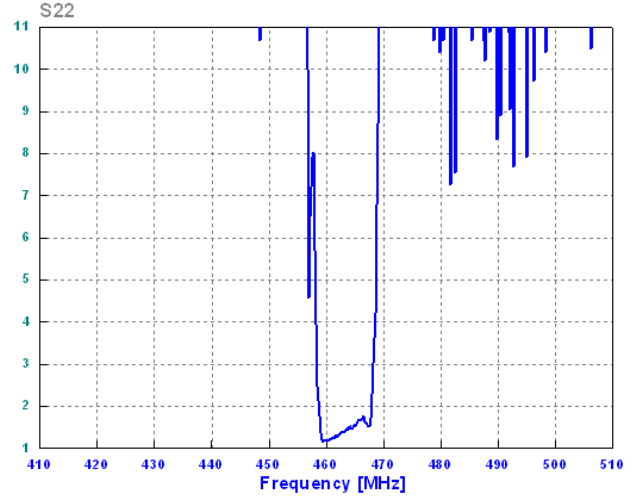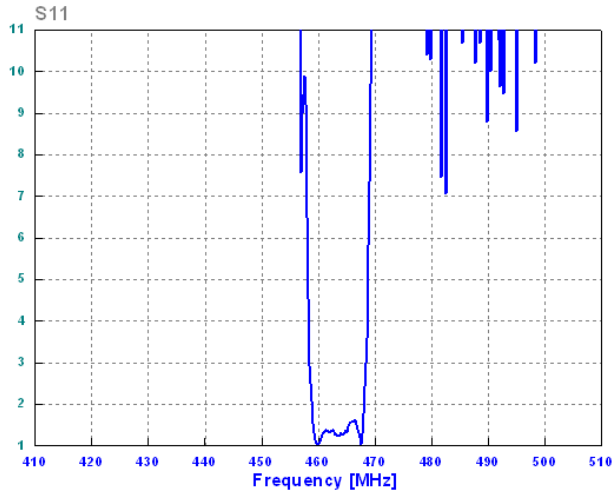

Smith Chart

