

- Wireless, RF SAW Filter
- Revision 0: March 2010


Electrical Characteristics

| MAXIMUM RATING | | | | |
|--|-----------------|---------|-----------|---------|
| PARAMETERS DESCRIPTION | UNIT | MINIMUM | TYPICAL | MAXIMUM |
| Operating Temperature Range | °C | -30 | - | +85 |
| Storage Temperature Range | °C | -40 | - | +85 |
| Maximum DC Voltage | V | - | - | 3 |
| Maximum Input Power | dBm | - | - | 10 |
| Source Impedance (single ended) ⁽¹⁾ | Ω | - | 50 | - |
| Load Impedance (single ended) ⁽¹⁾ | Ω | - | 50 | - |
| Package type & size | M | | | |
| Length x Width | mm ² | - | 3.0 x 3.0 | - |
| Height | mm | - | - | 1.4 |

| ELECTRICAL SPECIFICATION | | | | |
|---|-------------------|---------|---------|---------|
| PARAMETERS DESCRIPTION | UNIT | MINIMUM | TYPICAL | MAXIMUM |
| Center Frequency (Fo) | MHz | - | 827.5 | - |
| Insertion Loss within 820.0 ~ 835.0 MHz | dB | - | 2.7 | 3.5 |
| Amplitude Ripple within 820.0 ~ 835.0 MHz | dB _{p-p} | - | 0.7 | 1.5 |
| Attenuation: | | | | |
| 10.0 ~ 780.0 MHz | dB | 40 | 45 | - |
| 865.0 ~ 880.0 MHz | dB | 25 | 32 | - |
| 880.0 ~ 920.0 MHz | dB | 35 | 40 | - |
| 920.0 ~ 1220.0 MHz | dB | 40 | 45 | - |
| VSWR within 820.0 ~ 835.0 MHz | - | - | 1.5 | 2.0 |

Notes: (1) No Matching Network (Ref. Testing Environment Circuit as shown below).


Package Dimensions

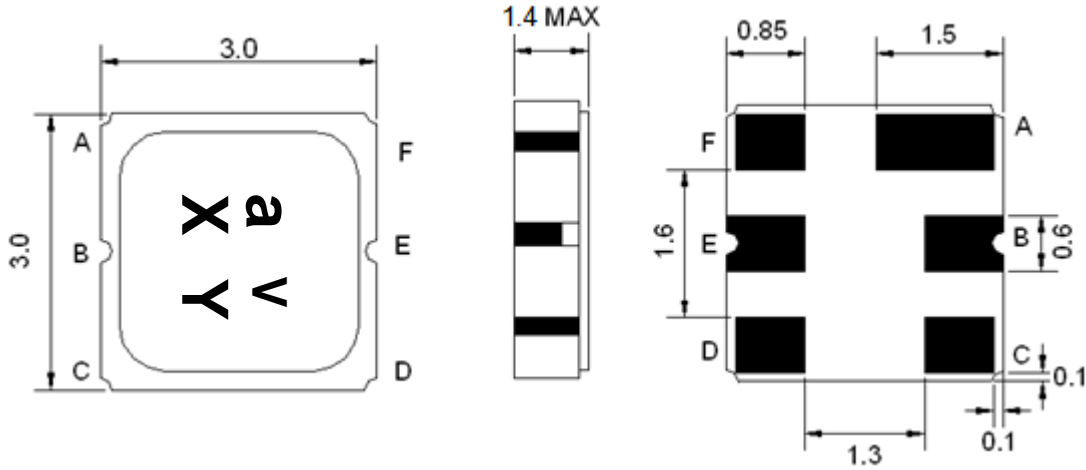

| Marking Descriptions | |
|----------------------|----------------------|
| a | Wireless Application |
| V | Series Number |
| X | Date Code (Year) |
| Y | Date Code (Month) |

| Pin Description | |
|-----------------|-----------|
| A, C, D, F | Ground |
| E | In or Out |
| B | Out or In |

Testing Environment

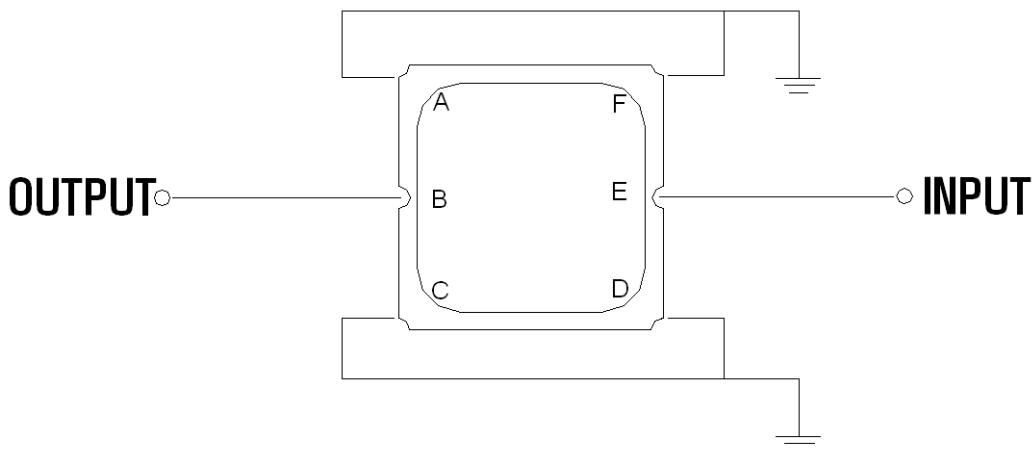

Source & Load Impedance: 50 Ω

Frequency Characteristics

Frequency Response

