

- Wireless, RF SAW Filter
- Revision 0: February 2011


Electrical Characteristics

MAXIMUM RATING				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Operating Temperature Range	°C	-30	-	+85
Storage Temperature Range	°C	-40	-	+85
Maximum DC Voltage	V	-	-	0
Maximum Input Power	dBm	-	-	10
Source Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Load Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Package type & size	M			
Length x Width	mm ²	-	3.0 x 3.0	-
Height	mm	-	-	1.3


ELECTRICAL SPECIFICATION				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Center Frequency (Fo)	MHz	-	885.0	-
Insertion Loss within 880.0 ~ 890.0 MHz	dB	-	2.7	3.5
Amplitude Ripple within 880.0 ~ 890.0 MHz	dB _{p-p}	-	0.8	1.2
Attenuation:				
870.5 MHz (Fo -14.5MHz)	dB	30	40	
871.5 MHz	dB	25	45	
899.5 MHz (Fo +14.5MHz)	dB	15	25	
900.5 MHz	dB	20	37	-
VSWR within 880.0 ~ 890.0 MHz	-	-	1.7	2.3

Notes: (1) No Matching Network

Package Dimensions


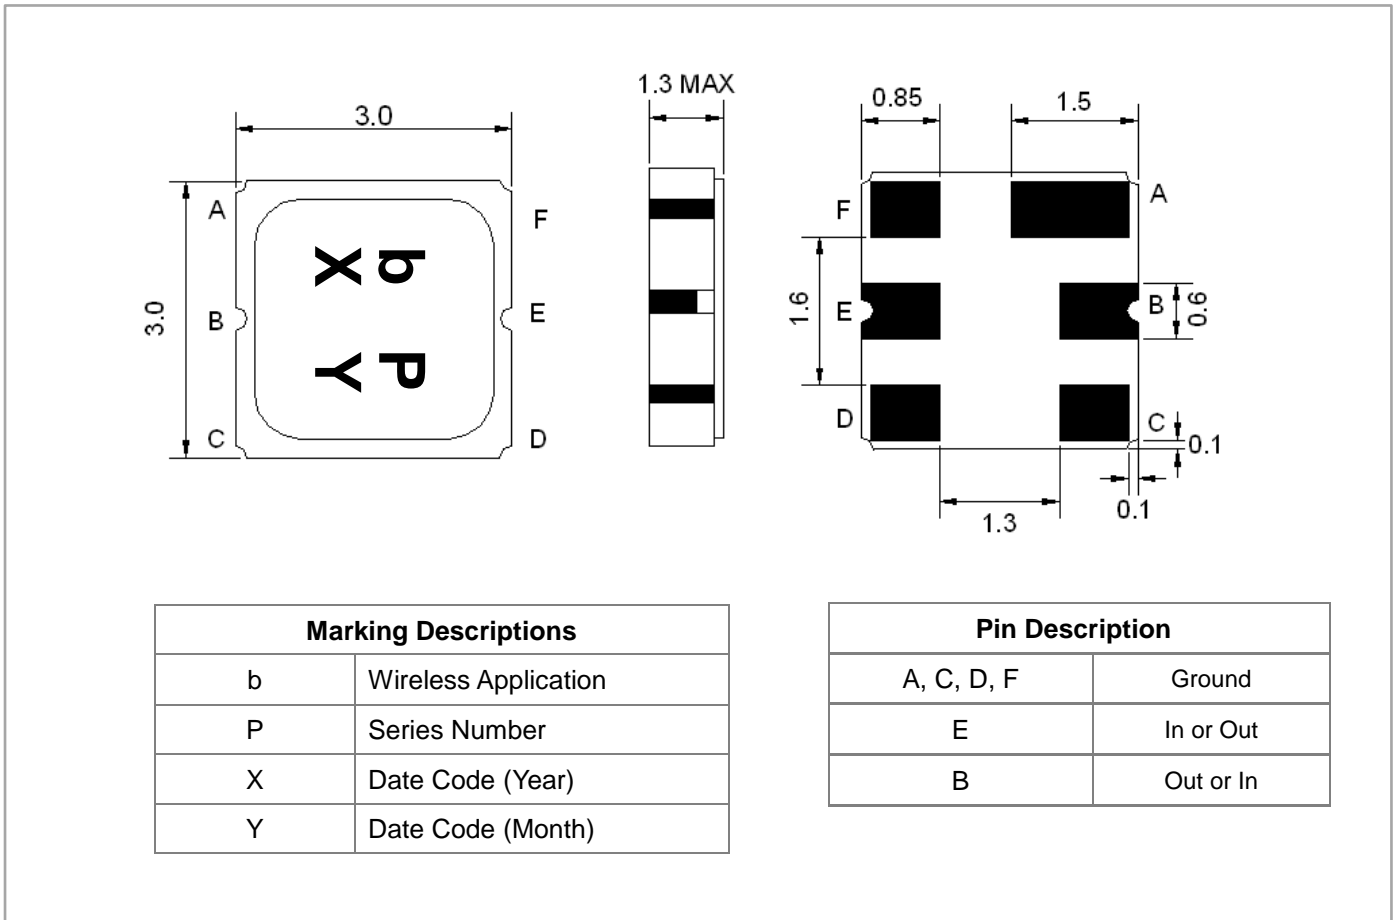


Testing Environment

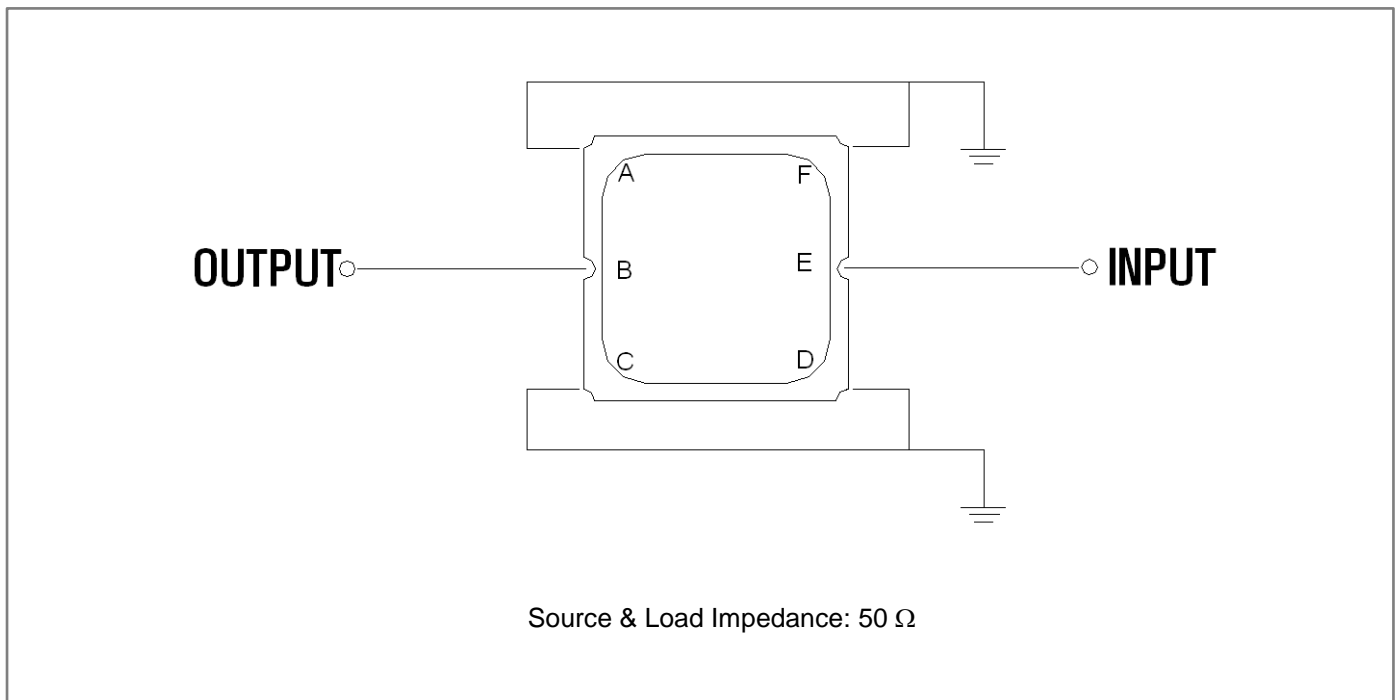


Frequency Characteristics

Frequency Response

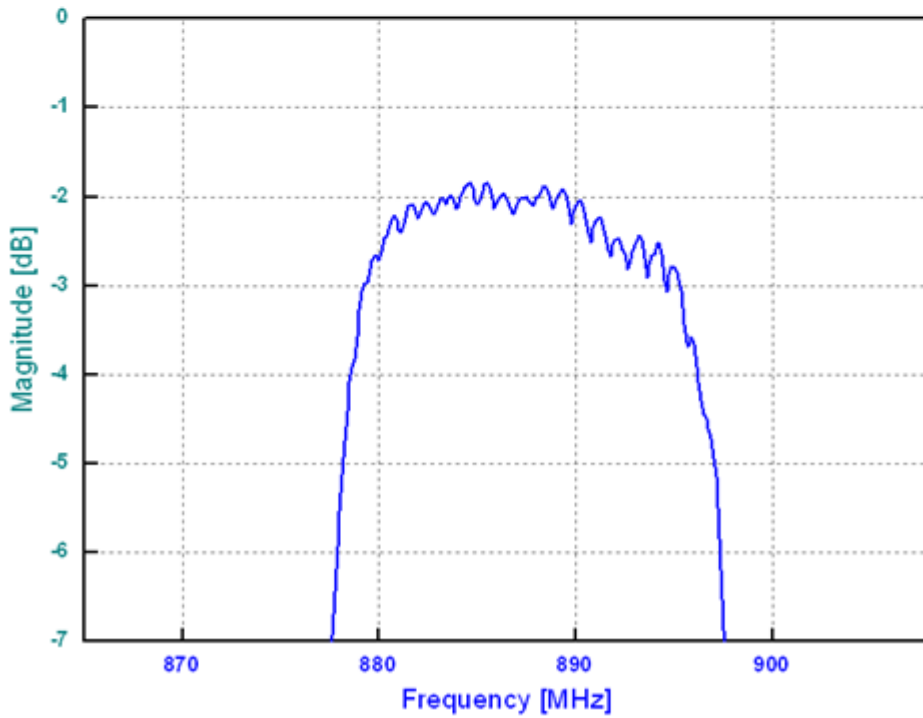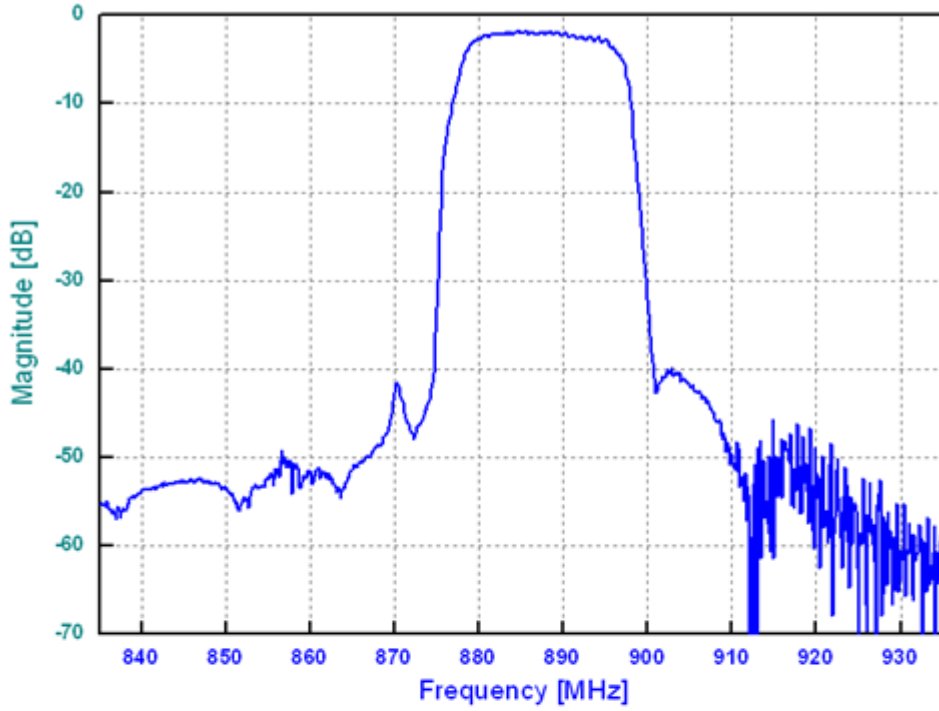

VSWR

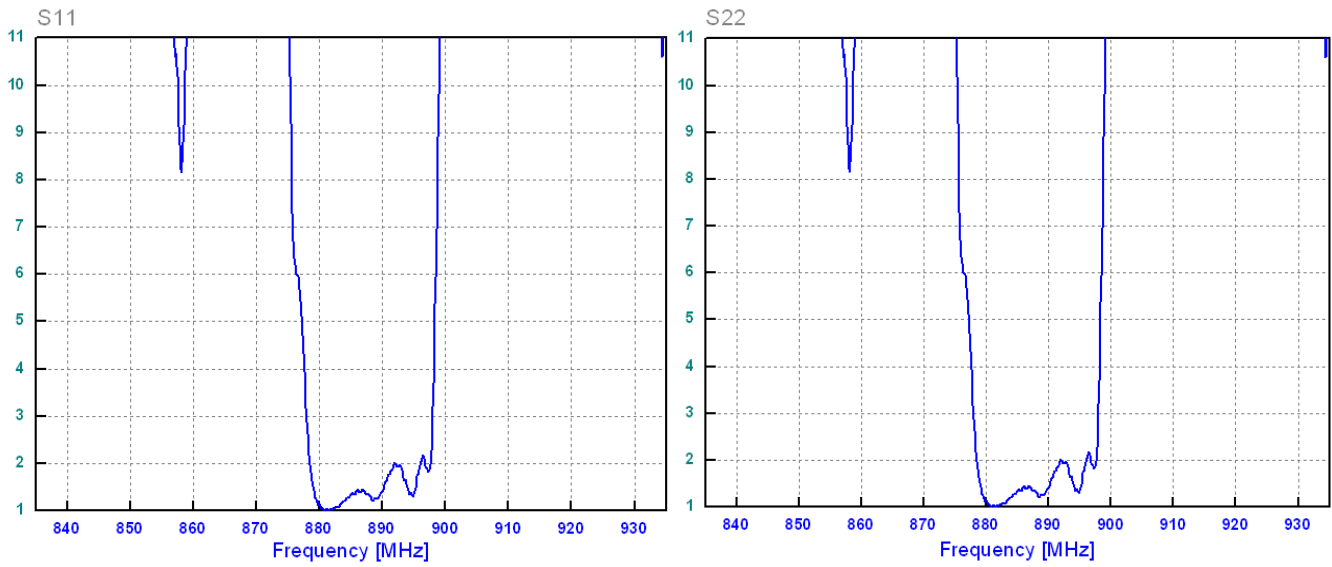

Smith Chart

