


ULTRA MINIATURE CERAMIC SMD CRYSTAL (1.6 x 1.2 x 0.4mm)

FEATURES:


- TIGHT TOLERANCE AND STABILITY AVAILABLE
- AUTOMOTIVE GRADE AEC-Q200 QUALIFIED VERSION AVAILABLE
- SUITABLE FOR ROHS REFLOW



■ SPECIFICATION

FREQUENCY RANGE	24.000MHz ~ 60.000MHz
STANDARD FREQUENCIES	26.000000MHz 27.000000MHz 27.120000MHz 32.000000MHz 36.000000MHz 40.000000MHz 50.000000MHz 60.000000MHz
FREQUENCY TOLERANCE @ 25°C	±10ppm ~ 50ppm (See P/N guide for other options)
FREQUENCY STABILITY	±10ppm ~ 50ppm (See P/N guide for other options)
OPERATING TEMPERATURE RANGE	STD: 0°C ~ 70°C, Option: -40°C ~ 85°C (See P/N guide for other options)
STORAGE TEMPERATURE RANGE	-55°C ~ 125°C
LOAD CAPACITANCE	STD: 8pF (See P/N guide for other options)
SHUNT CAPACITANCE	3.5pF max.
INSULATION RESISTANCE	500MΩ min. @ 100V _{DC} ± 15V _{DC}
DRIVE LEVEL	200μW max.
AGING @ 25°C ± 3°C	±2.0ppm / 1 st year max.
EQUIVALENT SERIES RESISTANCE	24.000MHz - 40.000MHz: 150Ω max. 40.001MHz - 60.000MHz: 80Ω max.
OPERATION MODE	AT Cut, Fundamental

■ PACKAGE DIMENSIONS

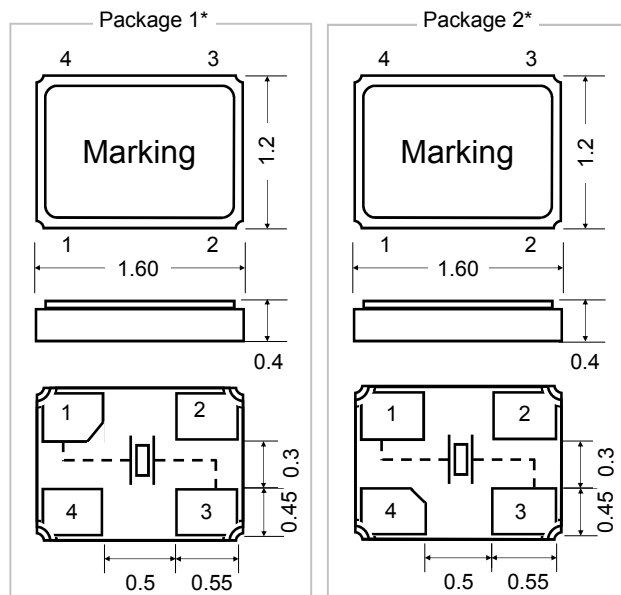


* Package 1 and 2 are provided interchangeably based on material availability.
** Different chamfer location between package 1 and 2.


Pin Configuration	
1	Xtal
2	GND
3	Xtal
4	GND

Unit : mm

■ SOLDER PATTERN



■ REFLOW PROFILE

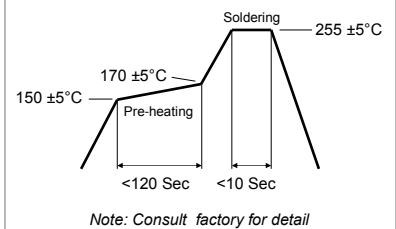

■ PART NUMBERING GUIDE

CS16 - F - 50 - 50 - HM - 08 - 26.000M - TR

Product series CS16	Stability 50: ± 50ppm 30: ± 30ppm 25: ± 25ppm 15: ± 15ppm 10: ± 10ppm XX: Two digit for Stability	Load Capacitance 08: 8pF 20: 20pF 10: 10pF 22: 22pF 12: 12pF 24: 24pF 16: 16pF 28: 28pF 18: 18pF 32: 32pF S: Series	Options Q: AEC-Q200 Qualified TR: Tape and reel
Mode F: Fundamental	Tolerance @ 25°C 50: ± 50ppm 30: ± 30ppm (standard) 25: ± 25ppm 15: ± 15ppm 10: ± 10ppm XX: Two digit for Tolerance	Operating Temperature A: -55 F: -20 M: 70 S: 100 B: -50 G: -10 N: 75 T: 105 C: -40 H: 0 P: 80 U: 125 D: -35 J: 50 Q: 85 X: custom E: -30 K: 60 R: 90	Frequency M: MHz

Transko Electronics, Inc reserves the right to make changes to the product (s), service (s), and specification (s) described herein without notice. See "Terms of Sale" for details on our website.