

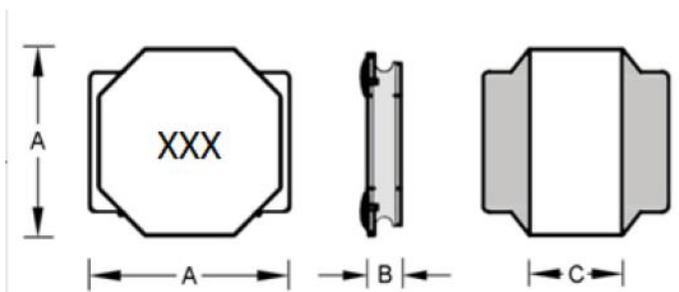


Resin Shielded Inductor SMD (4.0 X 4.0 X 1.0mm)
FEATURES

- Resin Shielded construction
- Low DC Resistance
- Halogen Free RoHS compliant
- Low Profile


SPECIFICATION

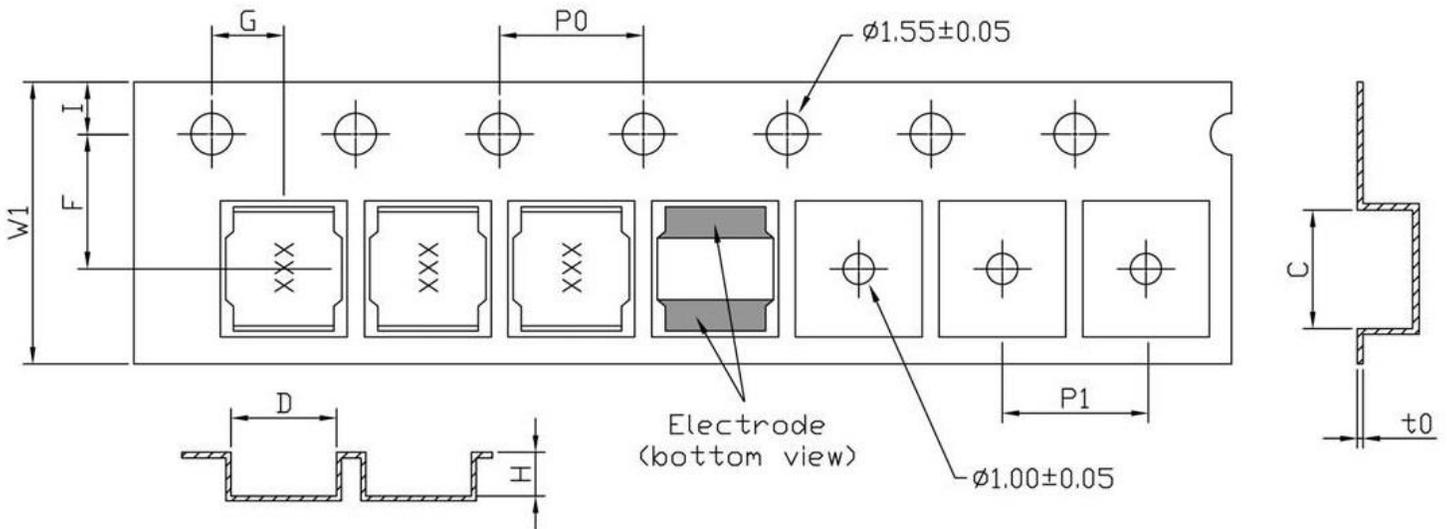
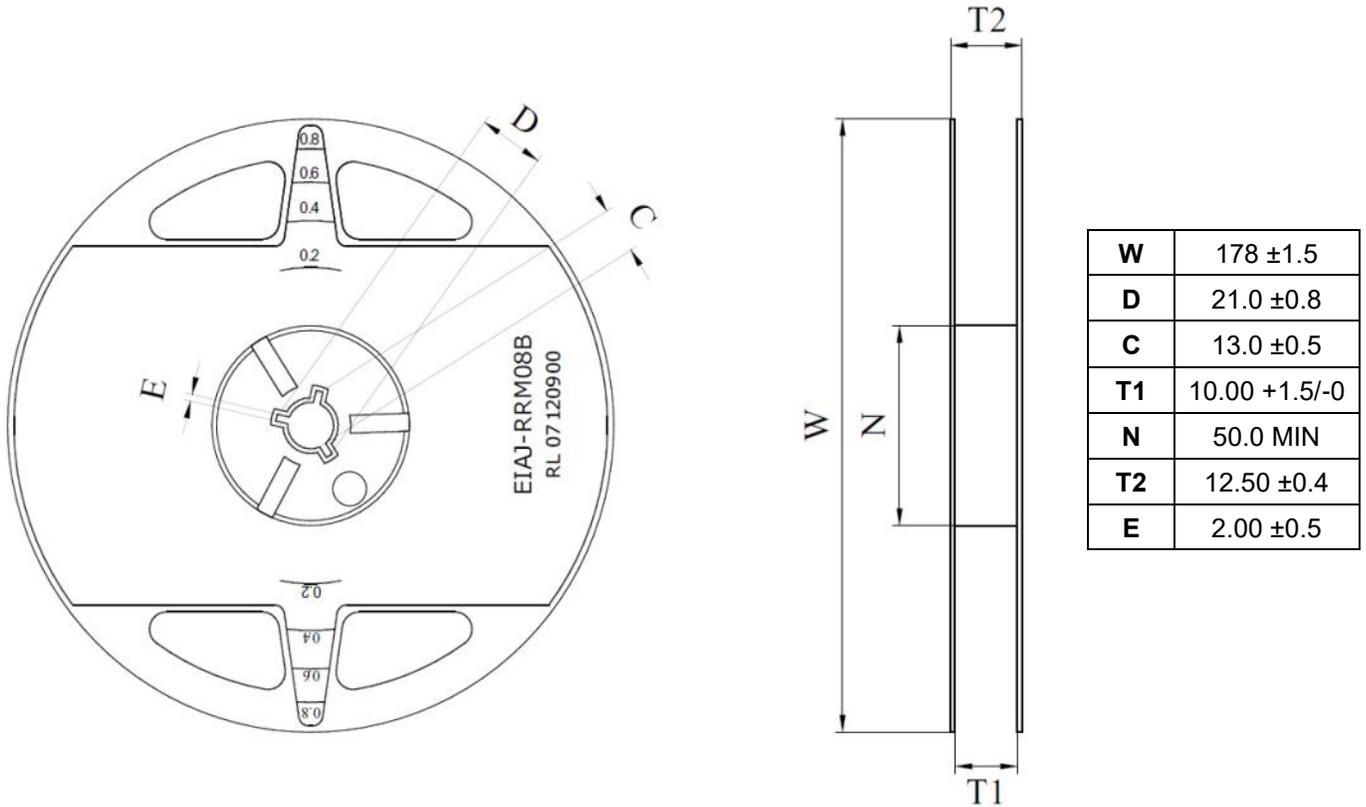
Part No.	Inductance (μH)	Tolerance	DC Resistance Max. (Ω)	Rated DC Current (A) Typ.	
				ΔL/L=30%	ΔT=40°C
TRSI4010F-1R5N	1.5	30%	0.104	1.50	1.50
TRSI4010F-2R2M	2.2	20%	0.148	1.30	1.30
TRSI4010F-3R3M	3.3	20%	0.171	1.25	1.25
TRSI4010F-4R7M	4.7	20%	0.260	1.20	1.20
TRSI4010F-6R8M	6.8	20%	0.360	1.00	1.00
TRSI4010F-100M	10.0	20%	0.533	0.80	0.80
TRSI4010F-220M	22.0	20%	1.360	0.36	0.36

- Measurement frequency of Inductance value : at 100KHz, 0.25V
- Test equipment: CH1062A / CH1320

DIMENSION

SOLDER PATTERN

SCHEMATIC


	A	B	C	G	H	I
mm	4.00 ±0.20	1.00 Max	1.40 Ref	4.20	3.70	1.60

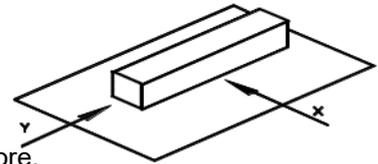
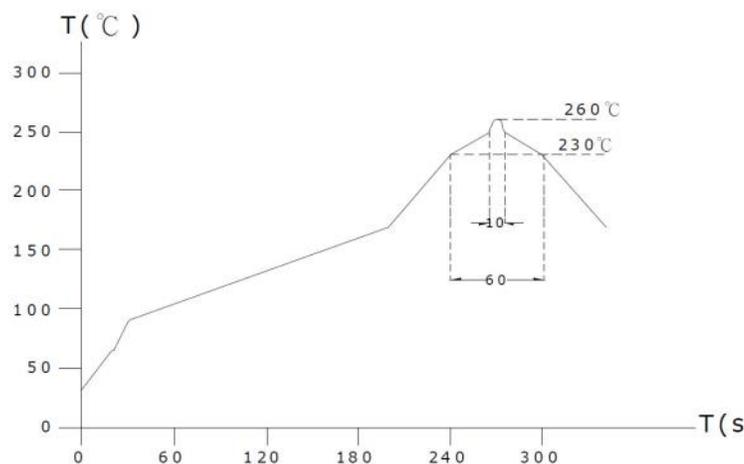
REEL DIMENSIONS (1000 pcs per reel)



W1	I	F	P0	G	P1	C	t0	D	H
12.00±0.1	1.75±0.1	5.50±0.1	4.00±0.1	2.00±0.1	8.00±0.1	4.30±0.1	0.30±0.05	4.30±0.1	1.30±0.1

RELIABILITY TEST

1. Operating temperature range
-40 TO + 105°C (Includes temperature when the coil is heated)
2. External appearance
On visual inspection, the coil has no external defects.
3. Terminal strength
After soldering. Between copper plate and terminals of coil. Push in two directions of X.Y withstanding at below conditions.
Terminal should not peel off. (refer to figure at right)
5.0N 60 sec.
4. Insulating resistance
Over 100MΩ at 100V D.C. between coil and core.
5. Dielectric strength
No dielectric breakdown at 100V D.C. for 1 minute between coil and core.
6. Temperature characteristics
Inductance coefficient $(0\sim 2,000)\times 10^{-6}/^{\circ}\text{C}$ (-25~+80°C)
7. Humidity characteristics (Moisture Resistance)
Inductance deviation within $\pm 5\%$, after 96 hours in 90~95% relative humidity at $40 \pm 2^{\circ}\text{C}$ and 1 hour drying under normal condition.
8. Vibration resistance
Inductance deviation within $\pm 5\%$, after vibration for 1 hour. In each of three orientations at sweep vibration (10~55~10 Hz) with 1.5mm P-P amplitudes.
9. Shock resistance
Inductance deviation within $\pm 5\%$, after being dropped once with 981m/s^2 (100G) shock attitude upon a rubber block method shock testing machine, in three different orientations.
10. Resistance to Soldering Heat: 260°C, 10 seconds (See recommend reflow)
11. Storage environment
Temperature: 0°C~35°C; -40°C~105°C (after PCB)
Humidity Range: 50% ~ 70% RH
12. Use components within 12 months.
If 12 months or more have elapsed, check solderability before use.


LEAD-FREE HEAT ENDURANCE TEST

LEAD-FREE RECOMMENDED REFLOW
