



OSCILLATOR (3.2 x 2.5 x 1.1mm)
FEATURES:

- HIGH STABILITY OVER EXTENDED TEMPERATURE RANGE
- WIDE FREQUENCY RANGE


■ SPECIFICATION


FREQUENCY RANGE		2.500MHz ~ 55.000MHz
FREQUENCY STABILITY		±10ppm ~ ±20ppm (overall condition)
OPERATING TEMPERATURE RANGE		STD: -30°C ~ 85°C, Option: -40°C ~ +85°C (See P/N guide for other options)
STORAGE TEMPERATURE RANGE		-55°C ~ 125°C
SUPPLY VOLTAGE ± 5%		+2.5V _{DC} ~ +3.3V _{DC}
SUPPLY CURRENT (Pin#1 = Open or VIH)		7mA max.
OUTPUT	LOGIC FAMILY	HCMOS
	LOAD	15pF max.
	LEVEL LOGIC '1' (V_{OH})	0.9 x V _{DD} min.
	LEVEL LOGIC '0' (V_{OL})	0.1 x V _{DD} max.
	SYMMETRY(DUTY CYCLE)	45% / 55% @ 1/2V _{DD} level
	RISE AND FALL TIME (Tr/Tf)	5nS max.
STAND-BY VOLTAGE	START-UP TIME	10mS max.
	ENABLE (V_{IH})	V _{DD} - 0.5V _{DC} min.
STAND-BY CURRENT (Pin#1 = V_{IL})	DISABLE (V_{IL})	0.5V _{DC} max.
	ENABLE DELAY TIME	10mS max.
DISABLE DELAY TIME		100nS max.
AGING @ +25°C ±3°C		±3.0ppm / 1 st year max.
PHASE JITTER RMS (12kHz ~ 20MHz)		100fS typ. 500fS max.
PHASE NOISE		-130dBc/Hz max. @ 1kHz offset

■ PACKAGE DIMENSIONS


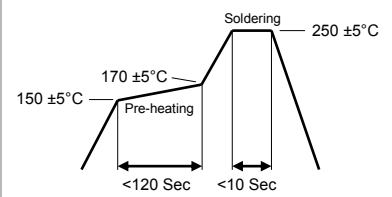
Unit : mm

Pin Configuration	
1	Disable Enable or N.C.
2	N.C.
3	GND
4	Z* Output
5	N. C.
6	V _{DD}


*Z: high impedance

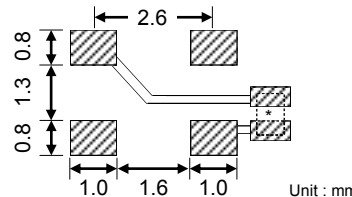■ SOLDER PATTERN


*0.01µF to 0.1µF bypass capacitor recommended

■ REFLOW PROFILE


Note: Consult factory for detail

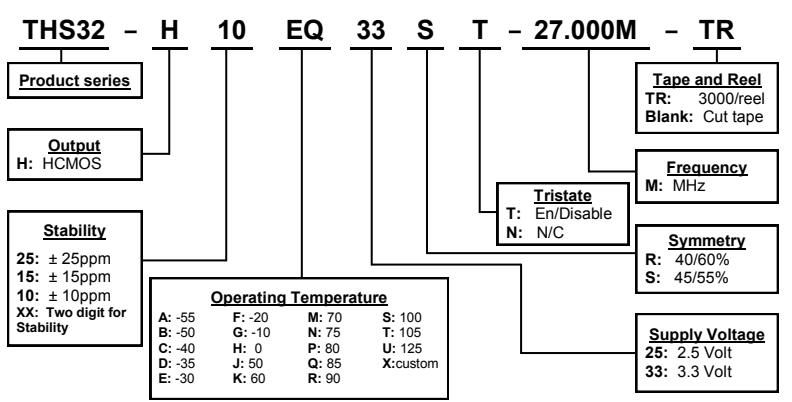■ PART NUMBERING GUIDE


Transko Electronics, Inc reserves the right to make changes to the product (s), service (s), and specification (s) described herein without notice. See "Terms of Sale" for details on our website.