

MINIATURE SMD PROGRAMMABLE OSCILLATOR (5.0 x 3.2 x 1.3mm)

FEATURES:


- CMOS PROGRAMMABLE OSCILLATOR
- MINITURE SMD PACKAGE WITH CMOS OUTPUT




SPECIFICATION

FREQUENCY RANGE	1MHz ~ 100.000MHz	1MHz ~ 166MHz	1MHz ~ 200MHz
FREQUENCY STABILITY	±10ppm ~ ±100ppm		
OPERATING TEMPERATURE RANGE	STD: 0°C ~ 70°C, Option: -40°C ~ 85°C (See P/N guide for other options)		
STORAGE TEMPERATURE RANGE	-55°C ~ 125°C		
SUPPLY VOLTAGE ± 10%	1.8V _{DC}	2.5V _{DC}	3.3V _{DC}
SUPPLY CURRENT	1MHz ≤ f < 30MHz	6mA max.	10mA max.
	30MHz ≤ f < 75MHz	8mA max.	15mA max.
	75MHz ≤ f < 133MHz	12mA max.	20mA max.
	133MHz ≤ f < 166MHz	—	22mA max.
	166MHz ≤ f < 200MHz	—	25mA max.
OUTPUT	LOGIC FAMILY	HCMOS	
	LOAD	15pF	
	LEVEL LOGIC '1' (V_{OH})	0.9 x V _{DD} min.	
	LEVEL LOGIC '0' (V_{OL})	0.1 x V _{DD} max.	
	SYMMETRY(DUTY CYCLE)	STD: 40% / 60%, Option: 45% / 55%	
	RISE AND FALL TIME (Tr/Tf): 1MHz ≤ f < 10MHz f ≥ 10MHz	5.0nS max. 4.0nS max.	4.0nS max. 3.0nS max.
STAND-BY VOLTAGE	ENABLE (V_{IH})	0.7 x V _{DD} ≤ V _{IH} ≤ V _{DD} or N/C	
	DISABLE (V_{IL})	V _{IL} ≤ 0.3 x V _{DD}	
STAND-BY CURRENT	15µA max.		
AGING @ 25°C ± 3°C	±3.0ppm / 1 st year max.		
PHASE JITTER RMS (12kHz ~ 20MHz)	20pS max.		


PACKAGE DIMENSIONS

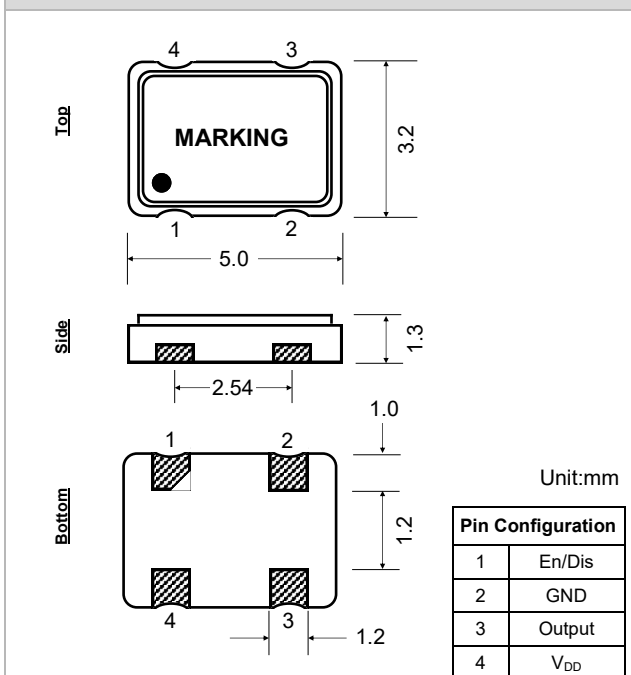


SOLDER PATTERN

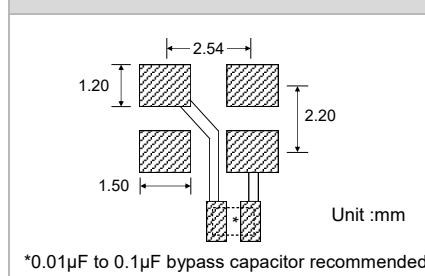

REFLOW PROFILE

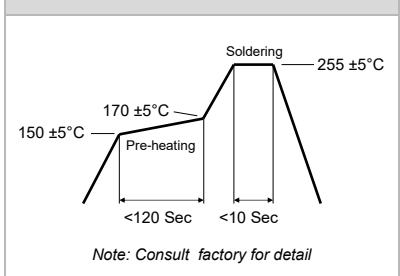

PART NUMBERING GUIDE

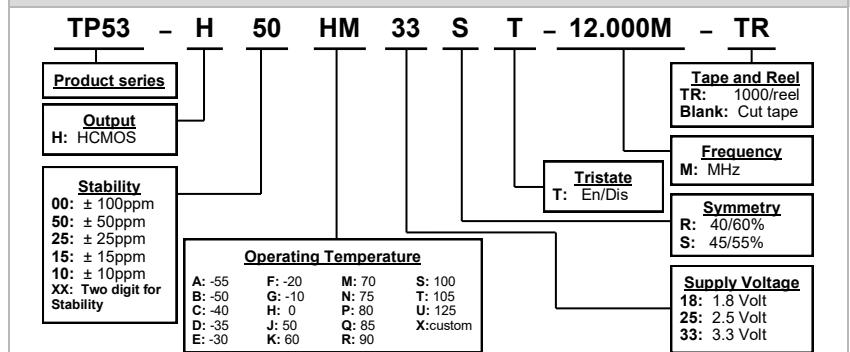

Transko Electronics, Inc reserves the right to make changes to the product (s), service (s), and specification (s) described herein without notice. See "Terms of Sale" for details on our website.