

- Wireless, RF SAW Filter
- Revision 0: November 2011


Electrical Characteristics

MAXIMUM RATING				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Operating Temperature Range	°C	-30	-	+85
Storage Temperature Range	°C	-40	-	+85
Maximum DC Voltage	V	-	-	0
Maximum Input Power	dBm	-	-	10
Source Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Load Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Package type & size	M			
Length x Width	mm ²	-	3.0 x 3.0	-
Height	mm	-	-	1.3


ELECTRICAL SPECIFICATION				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Center Frequency (Fo)	MHz	-	856.0	-
Insertion Loss within 851.0 ~ 861.0 MHz	dB	-	2.2	3.0
Amplitude Ripple within 851.0 ~ 861.0 MHz	dB _{p-p}	-	0.4	1.0
Attenuation:				
806.0 ~ 816.0 MHz	dB	40	53	-
VSWR within 851.0 ~ 861.0 MHz	-	-	1.5	2.0

Notes: (1) No Matching Network

Package Dimensions


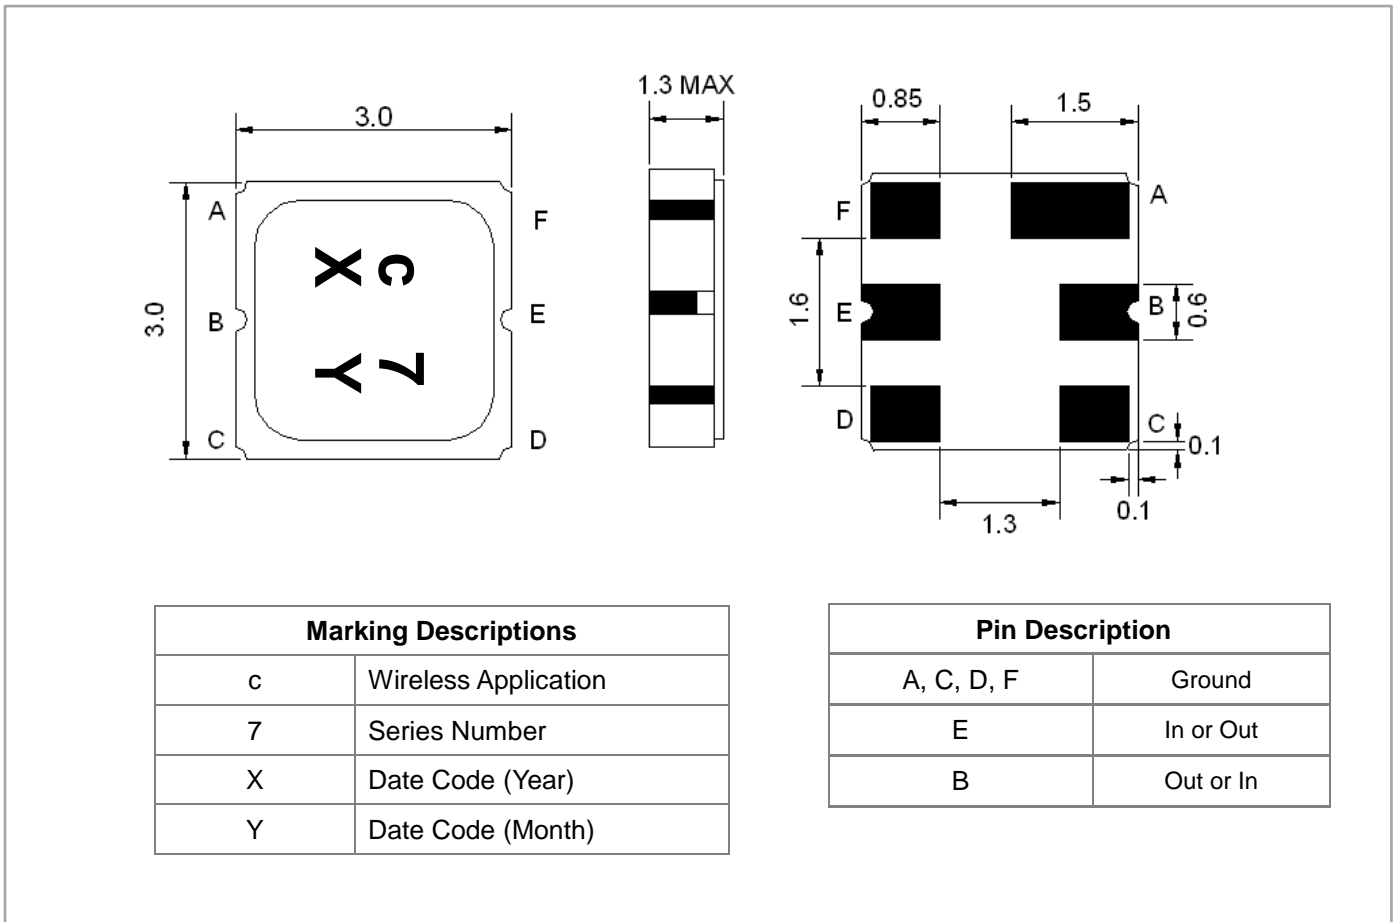


Testing Environment


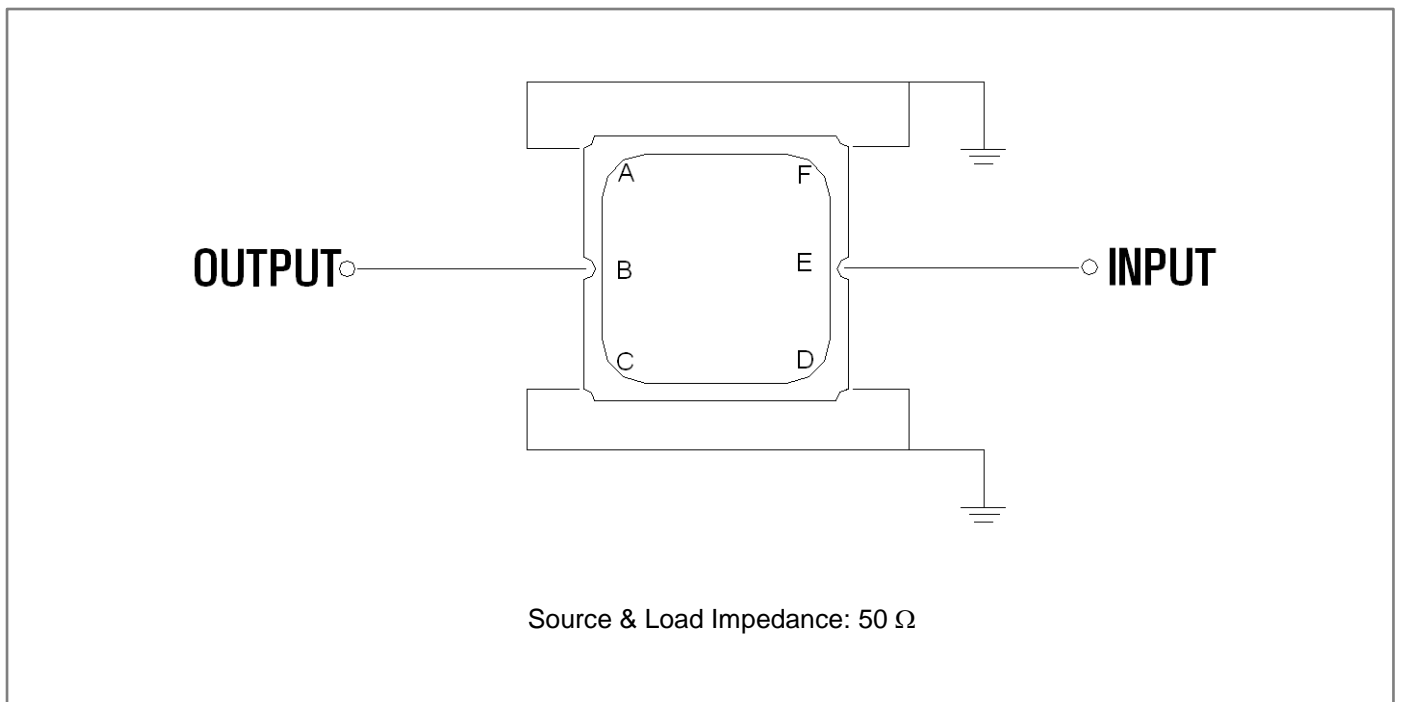


Frequency Characteristics

Frequency Response

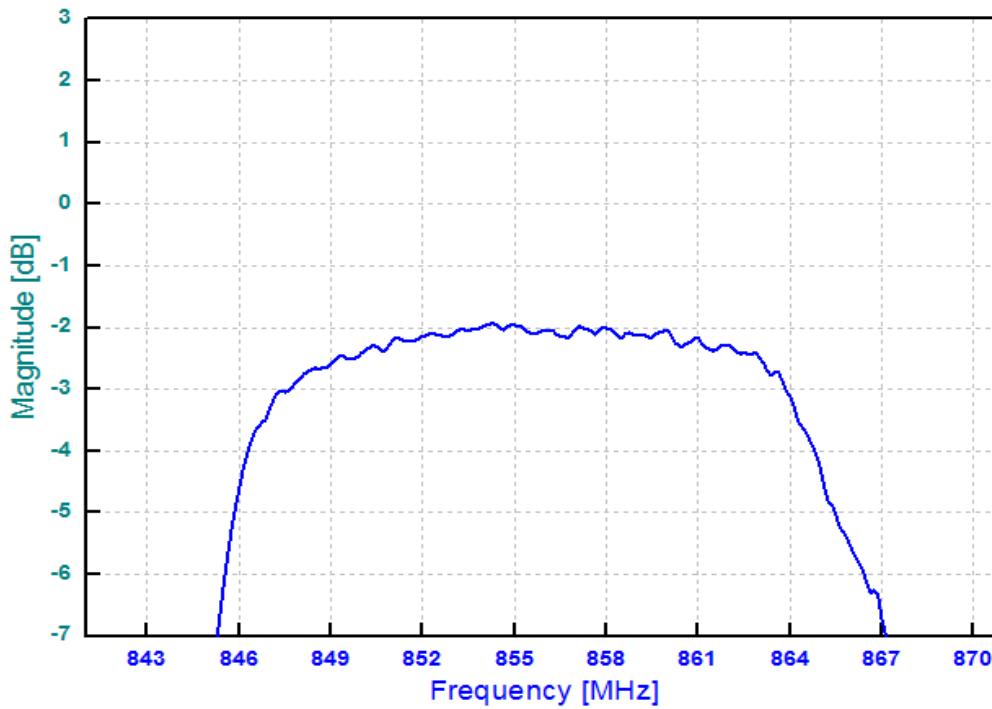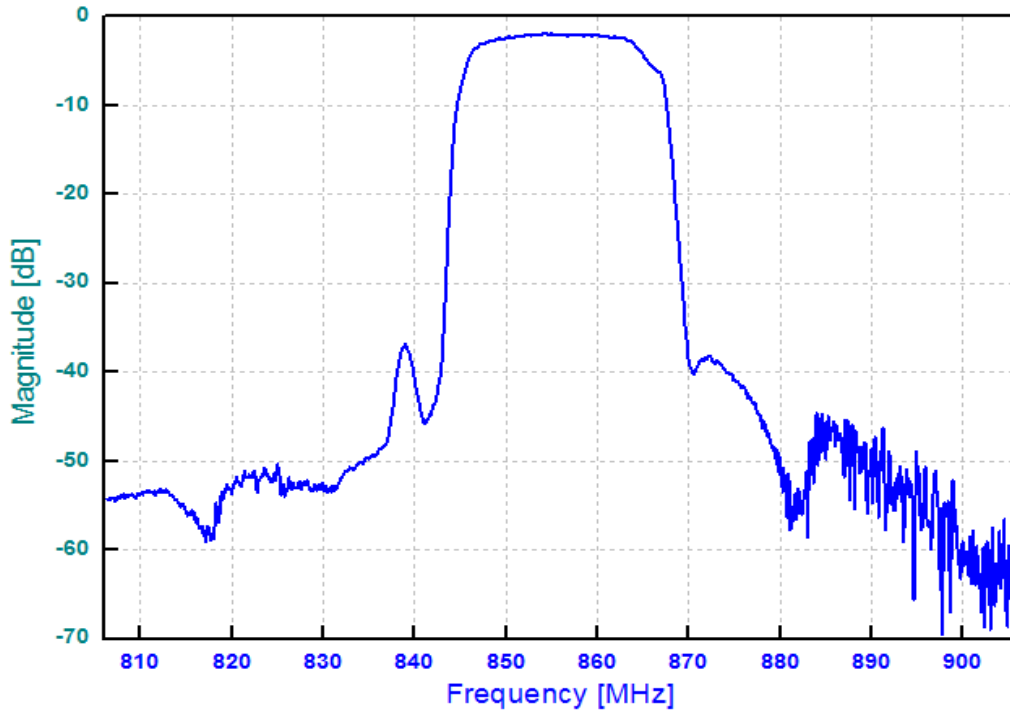

VSWR

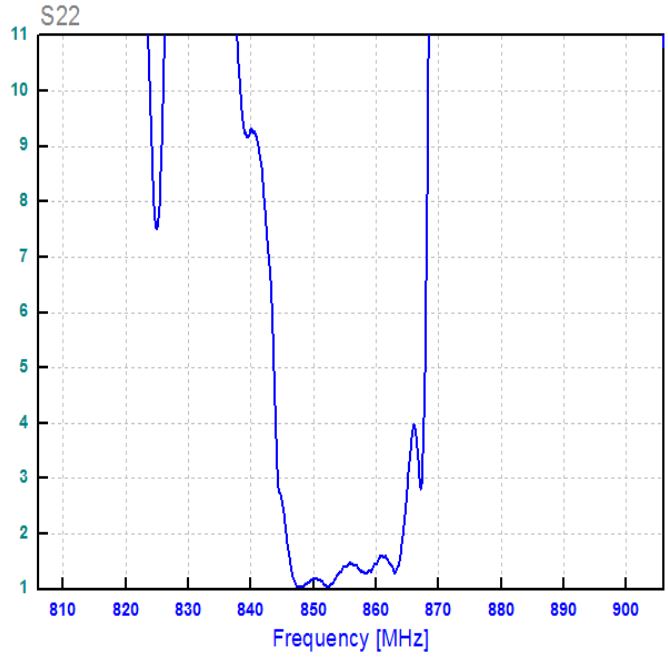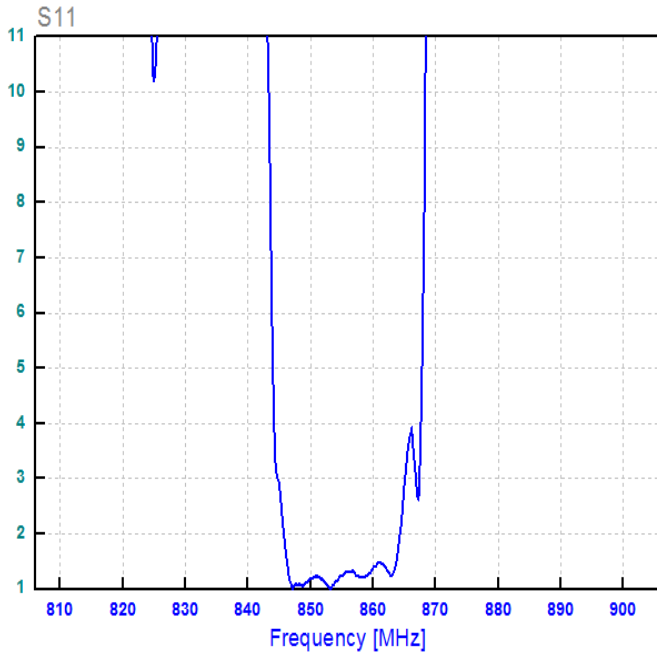

Smith Chart

